




# RM Inoxpres installation Memo

## Group 1 12- 54 mm

- make sure that the pressing tool you use has **32KN Force**. Check the label under battery (for example Novopress)
- for diameter **12-35mm** pressing with **jaws**.
- **42- 54 mm** pressing with **Chains** not jaws.
- **lubricate** the jaws often (for example every time you start working) to ensure correct functionality.
- the bigger diameters **lubricate even more often** 76,1mm 88,9mm 108mm (WD40 or similar).


# 1 Cut the pipe

- check that you use correct RM pipes
- manual cutter (**recommended**) up to **54 mm**. Then no need for removing the deburring, cleaning the pipe. 
- **hand held** electric disc machine (**not recommended**) when using you remove the stainless steel from pipe = > **increased corrosion risk**
- if using another cutter (electric etc.) **deburring the pipe** (cleaning) with the tool **inside & outside** is needed.



## 2. Marking

- mark the pipe with the **blue marking tool**.
- check that marker is next to **fitting edge** (tolerance 1-2mm)
- check that the **blue cap** is taken out from pipe



### 3.Check the O-ring

- if **O-ring** missing or damaged, take new pipe fitting or you can change the o-ring, ask new from RM.

## 4. Pressing

- Check that you use the **correct jaw/chain**
- insert the machine to **90 deg** towards pipes before pressing
- **press and hold until machine stops automatically**
- **press only once per joint**, (if you press more than one time the joint will be damaged)
- BT model can record the usage of machine for maintenance purposes (phone APP needed)


## 5. Check the joint

- check the **logo N** (if Novopress tool used sizes 12-54 mm), then the pressing is done with enough force and the joint guaranteed by RM.
- wrong installation may cause leaking in pipe.
- check the pipe that it has not any big deformations.
- **Calibration of the tool must be done every other year** to guarantee the functionality and acceptable joints.



## Group 2 76 - 108mm (same steps as in G 1)

- **120KN** pressing tool **force** needed , check the **label under battery** (for example Novopress).

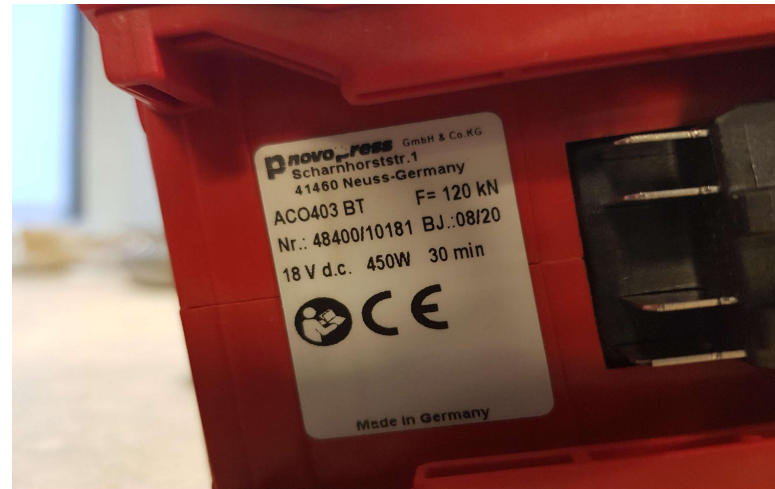

- **Only Klauke or Novopress machines to be used! Approved by RM.**



# Cutting and Marking

- **use special electric cutter tool to ensure correct and straight cut of the pipe**
- **remove the debree** from pipe with the tool
- **mark the pipe with marker plate**
- **do not remove the plastic sleeve before installation**
- plastic sleeve helps the tool to work, sleeve works also as a **lubricant**
- check the O-ring (unbroken, not damaged)



# Pressing

- choose **right chain size**
- **check the battery level** for successful <sup>AV1</sup> operation
- if the plastic sleeve removed or lost use **plastic film** before pressing or use **new fitting**
- **put chain first** to pipe then attach the pressing tool
- **press hold until machine stops automatically**
- when finished **the wings in the chain are open**, put the wings to right position



# Final steps

- remove the plastic sleeve -> **check logo N** (for Novopress), confirms the right force
- **lubricate chains/jaws often**
- pipe support, refer **Technical hand book**
- minimum distance between fittings, refer **Technical hand book**
- this is not an official installation guide. See the manufacturer's **Technical hand book** for official instructions

Ramator Oy  
Tierankatu 4  
20520 Turku, Finland  
Timo Kairama 010 835 3001  
timo.kairama@ramator.fi